



Welcome to

BECKY

CONTENTS

1

Company Profile

2

Product Introduction

3

Company Advantages

4

Cooperation Partners



Part 01

Company Profile

Committed to building a well-known brand of LED driver

Constantly creating value for customers

Company Profile



2008

Since



800 +

Employees



80 +

R&D



6 million +
(pcs per year)

Non-isolated
Quantity



12 million +
(pcs per year)

Total Quantity

Company Profile

PLANT A



PLANT B



Factories

- * Dongguan-Plant A
- * Dongguan-Plant B



R&D

- * Dongguan
- * Shenzhen
- * Changsha



Sales


- | | |
|------------|-------------|
| * Dongguan | * Ningbo |
| * Shenzhen | * Zhongshan |
| * DE, USA | |

Part 02

Product Introduction

Committed to building a well-known brand of LED driver
Constantly creating value for customers



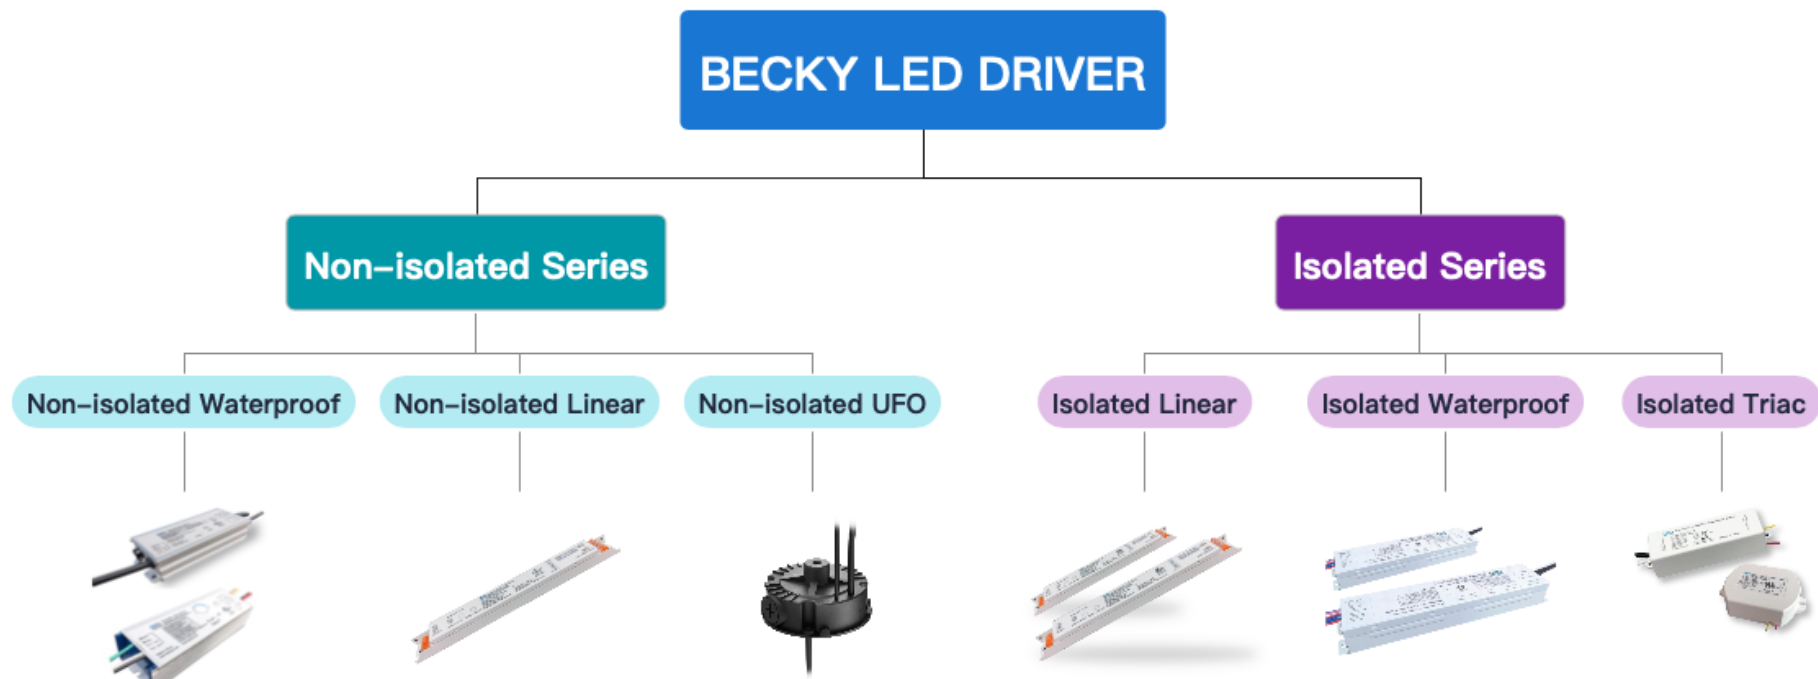


Non- isolated Waterproof - IP54



80- 500W

Features:

- **Input** : Nvolt (120- 277V); Uvolt (120- 347V); Xvolt (277- 480V)
- **External Photocell optional**
- Non- isolated and bipolar no flicker
- Adjustable current with internal potentiometer
- Input surge protection up to 6 / 6KV
- Optional for **0- 10V/ PWM / resistance dimming**
- Afterglow removing function optional
- 12V auxiliary
- 5 years warranty

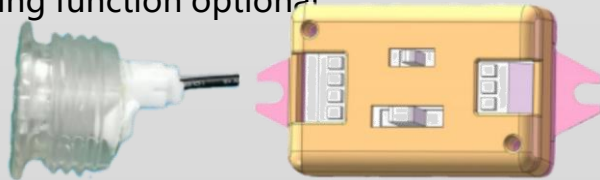

APPLICATION



The photos reference only


Non- isolated Waterproof - IP67




80- 500W

Features:

- **Input** : Nvolt (120- 277V); Uvolt (120- 347V) ; Xvolt (277- 480V)
- **External Photocell optional**
- Non- isolated and bipolar **no flicker**
- Adjustable current with internal potentiometer
- Input surge protection up to 6 / 6KV
- Optional for **0- 10V/ PWM / resistance dimming**
- Afterglow removing function optional
- 12V auxiliary
- 5 years warranty

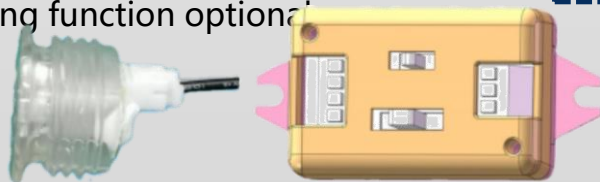

APPLICATION

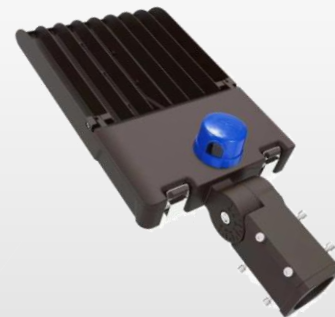

The photos reference only

Non- isolated Linear



25- 85W

Features:

- **Input : Nvolt (120- 277V); Uvolt (120- 347V)**
- Application: commercial lighting
- **Optional for title 24<30% and no flicker**
- Optional for 0- 10V/ PWM / resistance dimming
- 12V auxiliary power device
- **Dip- switch for 3- Wattage & 3- CCT change**
- 5 years warranty

APPLICATION



The photos reference only

Non- isolated UFO



100- 300W

Features:

- **Input** : Nvolt (120- 277V) ; Uvolt (120- 347V)
- **IP 65** protection constant current LED driver
- Non-isolated and **bipolar no flicker**
- Input surge protection up to 6/ 6KV
- Optional for **0- 10V/ PWM / resistance dimming**
- Dip- switch for **3- Wattage & 3- CCT change.**
- Afterglow removing function optional
- **12V auxiliary power device optional**
- **5 years warranty**

APPLICATION



The photos reference only

Isolated Linear with terminal



Features:

- **Input : Nvolt (120- 277V)**
- Application: commercial lighting
- Optional for 0- 10V/ PWM / resistance dimming
- 12V auxiliary power device
- **Dip-switch for 3- Wattage & 3- CCT change**
- **5 years warranty**

APPLICATION



The photos reference only

Isolated Linear with wires



20- 96W



Features:

- Input : Nvolt (120- 277V); Uvolt (120- 347V)
- Dip- switch Up&Down light Radio: 1:9 2:8 3:7 4:6 5:5
- External Dip- switch for 3- 5 Wattage & 3- CCT change
- Optional for 0- 10V/ PWM/ resistance dimming
- Isolated constant current two channels output
- 5 years warranty

APPLICATION



The photos reference only

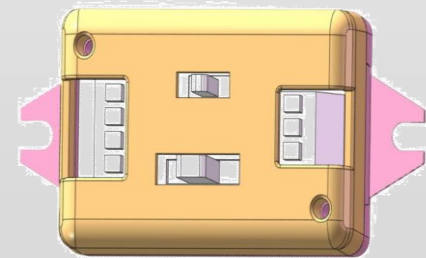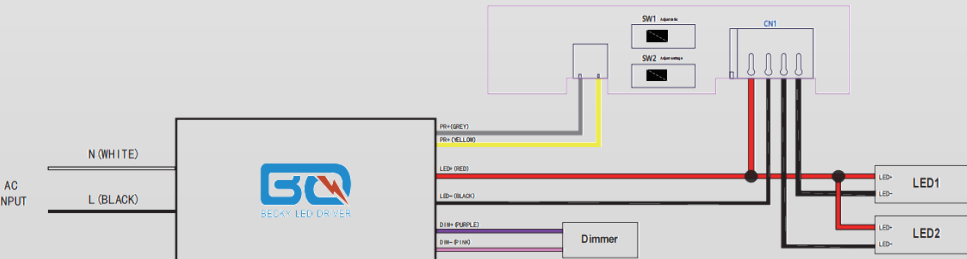

Isolated Two Channel Output



120- 192W

Features:

- **Input:** Nvolt (120- 277V); Uvolt (120- 347V)
- **Two Channel Output:**
- 120W (60*2); 140W(70*2); 165W (80*2); 192W (96*2)
- **Class P & Class 2** certificate
- Optional for 0- 10V/ PWM / resistance dimming
- **External dip- switch for 3- 5 Wattage & 3- CCT change**
- Isolated and no flicker
- 5 years warranty



APPLICATION




The photos reference only

BECKY LED DRIVER



- **Input:** Nvolt (120 - 277V); Uvolt (120- 347V)
- **External Photocell optional**
- Single Channel Output:
- Class P & Class 2 certificate
- Optional for 0- 10V/ PWM/ resistance dimming
- **External dip- switch for 3- Wattage & 3- CCT change**
- 5 years warranty

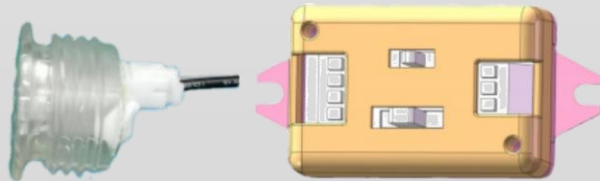

The photos reference only

Isolated Triac



10- 48W

Features:

- **Input** : Lvolt (120V)
- **Compatible** with Lutron, Levton, Cooper, etc.
- **IP 65** protection
- Application: residential lighting
- Isolation up to **DLC standard**
- 5 years warranty

APPLICATION



Part 03

Company Advantages

Committed to building a well-known brand of LED driver

Constantly creating value for customers



R&D Advantages



80 +

30+
Senior engineers
(10 years+ Design experience)

10+
Reliability Verification engineers

5+
Structure engineers

35+
Technicians & Test

R&D Center



Reliability Lab



R&D Advantages

(P) 60 +

- ◆ **Invention**
- ◆ **Utility Models**
- ◆ **Design**

PATENTS



Production Advantages

Products Capability:

48000 pcs/day

Production Equipment	Lines/Sets
SMT	6
Soldering Machine	9
ATE (Automatic Test equipment)	26
Aging Equipment	40
Potting Equipment	16
Assembling & Packing	8

Workshop



SMT(1)



SMT(2)



SMT(3)



Insert(1)



AOI



ATE test

Production Advantages

Testing Equipmnt:

Testing Equipment	Sets
High Pot	26
Integrated tester	30
Oscilloscope	20
Constant Humility&Temperature	8
Inrush Current Tester	2
ESD Tester	2
Flicker Tester	6
Electronic Load	30
Thermal Shock tester	1
AC source	32
EMI tester	1
Ringng Tester	2
Testing Dimmer	200

Workshop



AOI(1)



AOI(2)



AUTO GLUE



Burn-in(1)



Burn-in(2)



Auto-test

BECKY LED DRIVE



60 +

10+
IQC engineers

20+
IPQC engineers


25+ QA engineers

CERTIFICATION

[illegible]

Global Certificate: UL, TUV, CE, CB, ENEC, etc.
ISO9001: Since 2015

Performance Advantages

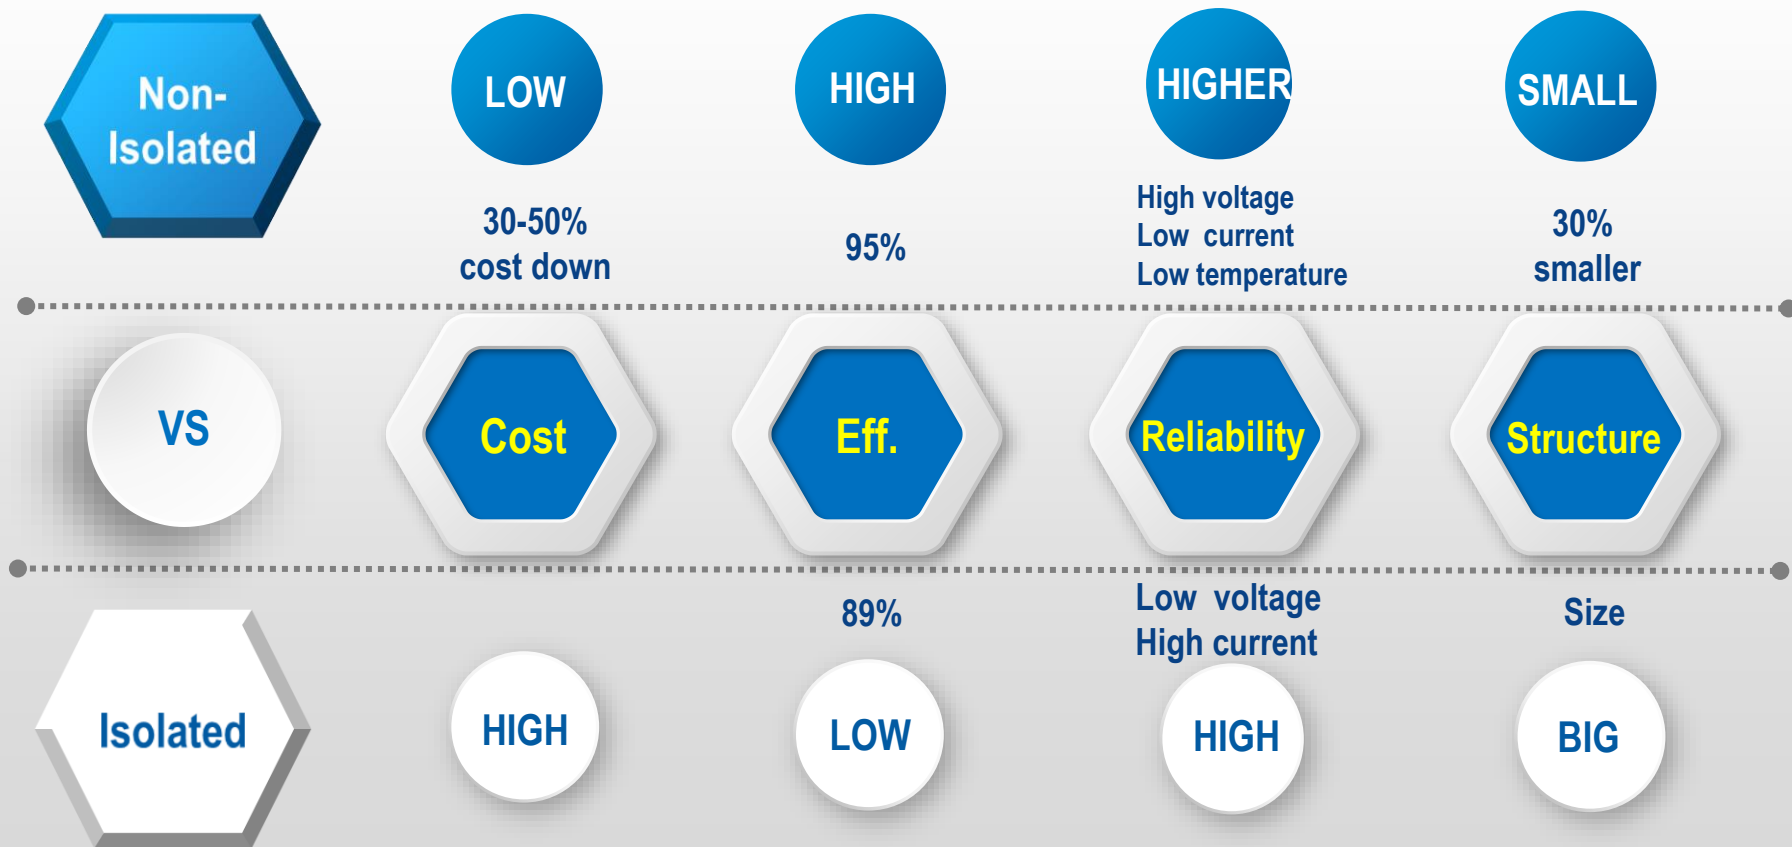


PCB Customization

LED MODULES



R&D Center

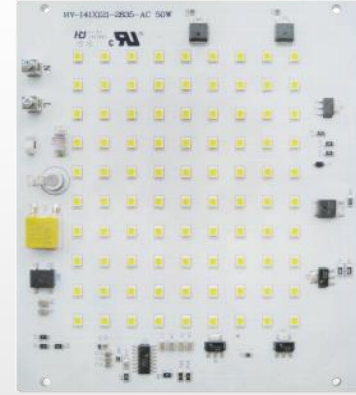

SERVICE



PCB manufacture



LED modules



Electronic design
services



Production & Test

Part 04

Cooperation Partners

Committed to building a well-known brand of LED driver
Constantly creating value for customers





Cooperation Partners






Cooperation Partners





Cooperation Partners



Thanks for your attention